




# VIMEK 606 BioCombi



**Vimek 606 BioCombi, a combi machine for both felling and transportation of bioenergy. The low fuel consumption, high ground clearance and balanced ground pressure in Vimek 606 BioCombi all together offers a machine careful for forest and environment.**

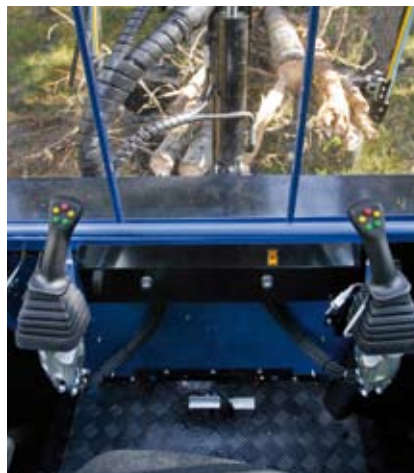

## Technical specification Vimek 606 BioCombi

### Engine

Kubota D 902-E  
18 kw/3.600 rpm

### Gear box

Speed, 0-20 km/hour

### Transmission

Variable mechanical

### Generator

12 V, 60A

### Front tires

405/70-24

### Rear tires

400/60-15,5

### Ground clearness

40 cm

### Hydraulic

Flow 35 l/min, 200 bar

### Length

6,20 m

### Width

1,80 m

### Loading capacity

3.000 kg

### Weight incl. crane

3.280 kg

### Crane

MOWI 2051  
Max reach, 5,20 m  
Lifting capacity at 4 m 440 kg  
Turning angle, 300°

### Combi Grapple

Vimek 160  
Max cutting diameter, 16 cm  
Accumulation as extra accessorie

### Extra accessories

Wheel tracks  
Diesel engine heating system  
Wheel chains  
Curtains for sun protection  
Dolly trailer  
Xenon lights  
Radio controlled hydraulic winch  
Grapple 0,16 m<sup>2</sup>  
CD/Radio

# VIMEK

For more information and to find your nearest retailer, please visit our website [www.vimek.se](http://www.vimek.se)!